

AIR SUMP PUMP(MULTI)

Eliminate all water residues and sludge perfectly before Painting !!

• Specification

Model	AIR SUMP PUMP(MULTI)
Code	A66000
Power supply	Air Pressure
Pump Weight(Kgs)	2.6
Valid length of outlet hose(M)	20
Max output(L/min)	100
Water pressure(Kgf/cm ²)	3.6
Max RPM/min	12000
Included	
- Air Sump Pump(2.6kgs) for larges	
- Ejector(10m)(3.4kgs) for residues	
- Air Rotor Lub Oil(250ml)	

* This has been used in most of shipyards to improve their painting job.



Solution

[before]



[after]



HAN SHIN PAINTING SYSTEMS

Head Office & Factory #552, Shinyung 1dong, Sahagu, Busan, Korea / Tel.82-51-291-4138 / Fax.82-51-291-4194 / Zip code : 604-032
Overseas Business Department Tel.82-51-319-3039 / Fax.82-51-319-3049 / E-mail : hasco@hascopro.co.kr hascopro@hotmail.com / URL : www.hasco-airless.com



AIR SUMP PUMP (MULTI)

• Attention

- This is available only for water level under Air Vent.
- Prior to working, to be lubricated Air-Inlet with "Air Rotor Lub Oil".
- Disconnect certainly to be "OFF" air inlet line on cleaning.
- After working, it is recommendable to lubricate Air-Inlet with "Air Rotor Lub Oil" for efficient maintenance.




Air Sump Pump / Air Rotor Lub Oil



Ejector (10m)

• Air Sump Pump for Larges

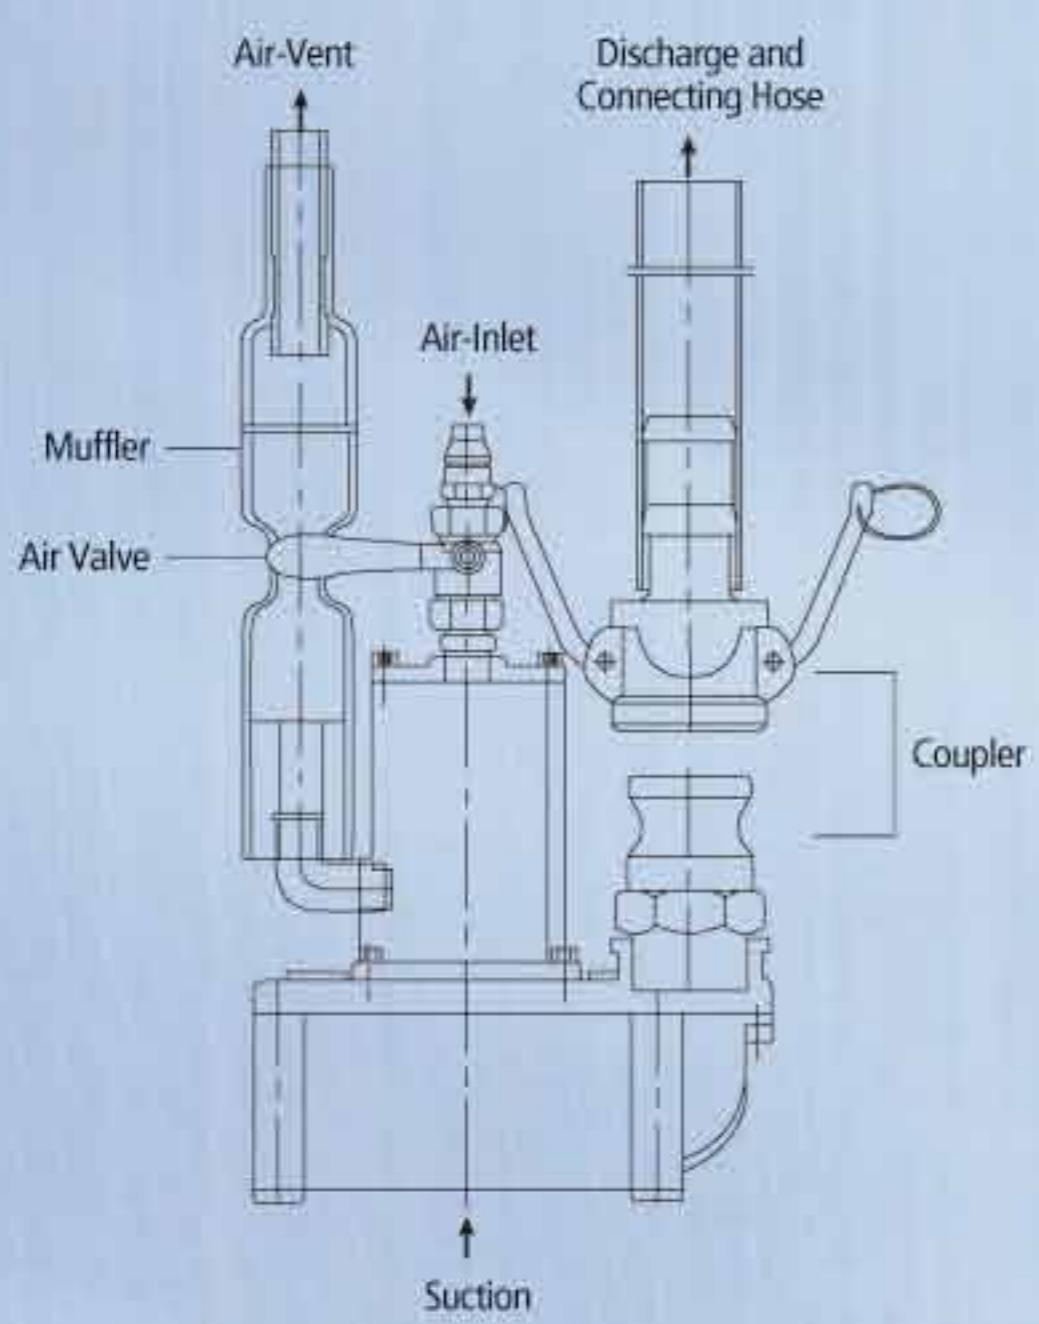

• Ejector for Residues

